




41502 N. Schnepf Rd.  
 San Tan Valley, AZ 85132  
 Phone: 480-610-5155  
 www.severtsonscreens.com  
 info@severtsonscreens.com



## IR Remote Codes for Electric Screens

### Timings:

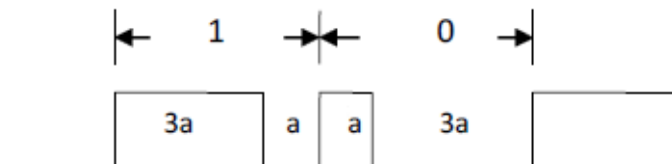

### Standard Hex Codes:

**Up:**

D2 01 EE C1

**Down:**

D0 81 DD 2E

**Stop:**

D1 01 CC 9E

### 32-Bit Hex Codes:

**Up:**

00F0 0011 00DD 00DE

**Down:**

00F0 0041 00EE 001F

**Stop:**

00F0 0021 00CC 00DD

**Micro-Up**

00F0 0081 00D1 0042

**Micro-Down**

00F1 0001 00E1 00D3

### 32-Bit Binary Codes:

**Up:**

11110000 00010001 11011101 11011110

**Down:**

11110000 01000001 11101110 00011111

**Stop:**

11110000 00100001 11001100 11011101

**Micro-Up**

11110000 10000001 11010001 01000010

**Micro-Down**

11110001 00000001 11100001 11010011



## Pronto Hex Codes for Electric Screens

41502 N. Schnepf Rd.  
San Tan Valley, AZ 85132  
Phone: 480-610-5155  
www.severtsonscreens.com  
info@severtsonscreens.com

### Up (hex):

```
0000 006E 0000 0020 0032 0014 0030 0014 0012 0031 0030 0014  
0012 0031 0012 0031 0030 0014 0012 0031 0012 0031 0012 0031  
0012 0031 0012 0031 0012 0031 0012 0031 0012 0031 0030 0014  
0030 0014 0030 0014 0030 0014 0012 0031 0030 0014 0030 0014  
0030 0014 0012 0031 0030 0014 0030 0014 0012 0031 0012 0031  
0012 0031 0012 0031 0012 0031 0030 045A
```

### Down (hex):

```
0000 006E 0000 0020 0032 0014 0030 0014 0012 0031 0030 0014  
0012 0031 0012 0031 0012 0031 0012 0031 0030 0014 0012 0031  
0012 0031 0012 0031 0012 0031 0012 0031 0012 0031 0030 0014  
0030 0014 0030 0014 0012 0031 0030 0014 0030 0014 0030 0014  
0012 0031 0030 0014 0012 0031 0012 0031 0030 0014 0012 0031  
0030 0014 0030 0014 0030 0014 0012 0477
```

### Stop (hex):

```
0000 006E 0000 0020 0032 0014 0030 0014 0012 0031 0030 0014  
0012 0031 0012 0031 0012 0031 0030 0014 0012 0031 0012 0031  
0012 0031 0012 0031 0012 0031 0012 0031 0012 0031 0030 0014  
0030 0014 0030 0014 0012 0031 0012 0031 0030 0014 0030 0014  
0012 0031 0012 0031 0030 0014 0012 0031 0012 0031 0030 0014  
0030 0014 0030 0014 0030 0014 0012 0477
```




# Trigger Connection Pinout and RS-232 Codes (hex) for Electric Screens


41502 N. Schnepf Rd.  
San Tan Valley, AZ 85132  
Phone: 480-610-5155  
www.severtsonscreens.com  
info@severtsonscreens.com

Baud rate: 2400  
data bits: 8  
stop bits: 1

For models: GE, GT, SE, ST, MT, LSE, EPM

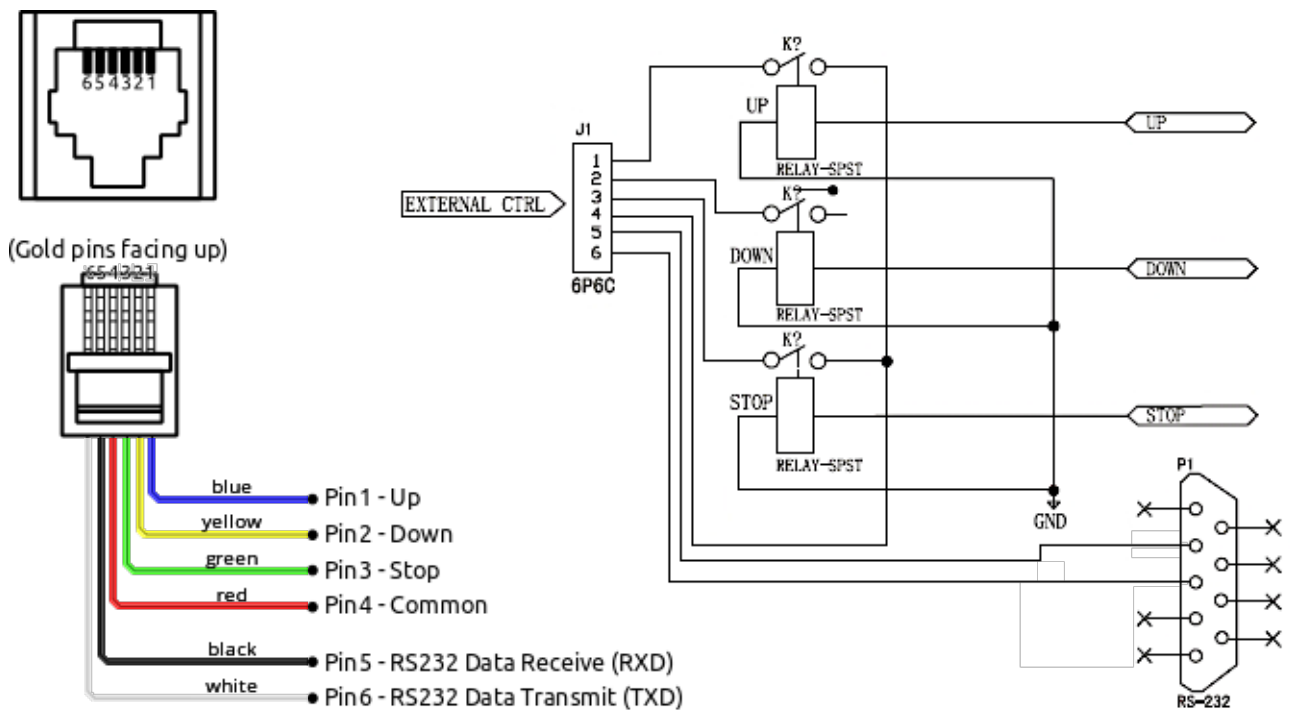

(Gold pins facing up)

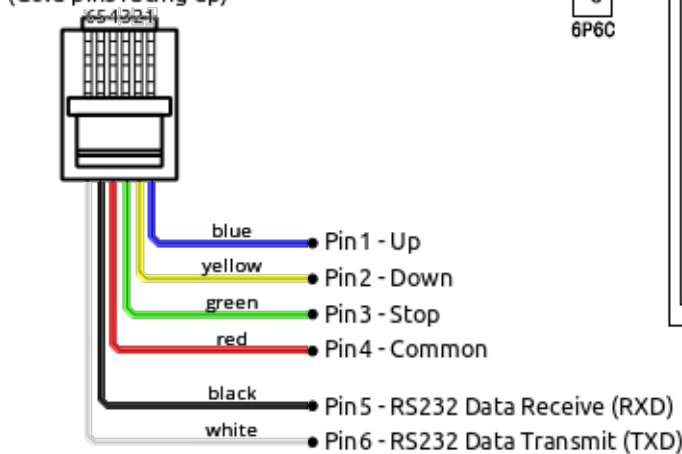

## Up (hex):


FF EE EE EE DD

## Down (hex):

FF EE EE EE EE

## Stop (hex):

FF EE EE EE CC

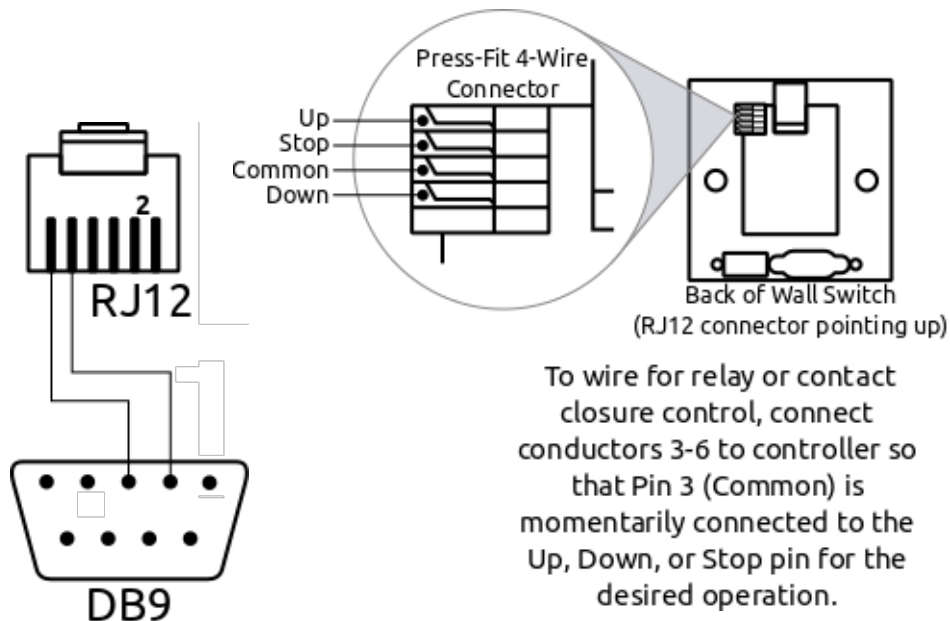




Serial Connection Pinout  
and RS-485 Codes (hex) for  
Electric Screens

41502 N. Schnepf Rd.  
San Tan Valley, AZ 85132  
Phone: 480-610-5155  
www.severtsonscreens.com  
info@severtsonscreens.com

Baud rate: 9600  
data bits: 8  
stop bits: 1

For models: DSE, DST, CDT, LSE

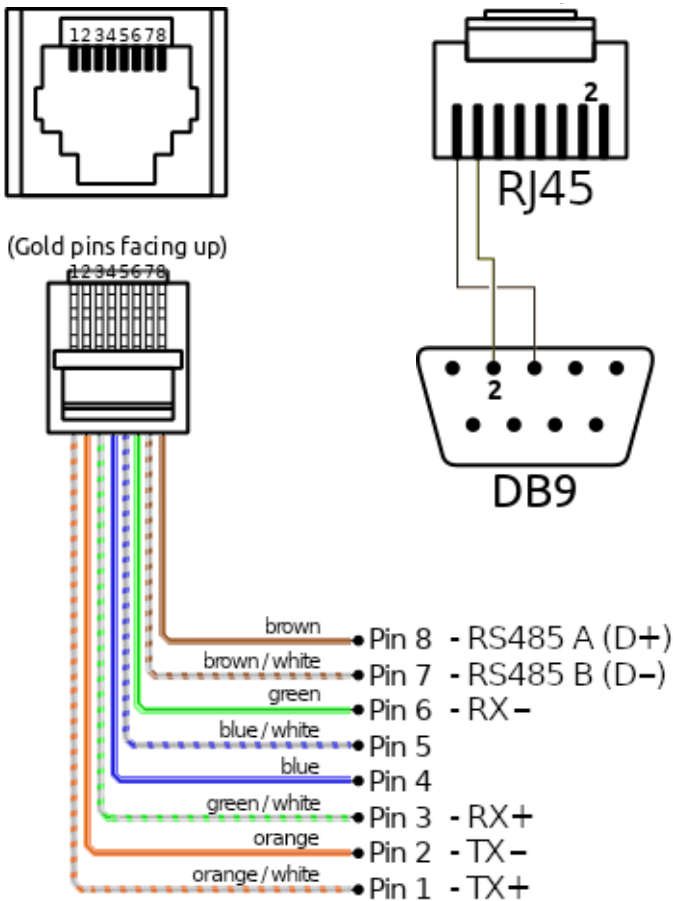

**Up (hex):**

FF FF EE EE EE DD

**Down (hex):**

FF FF EE EE EE EE

**Stop (hex):**

FF FF EE EE EE CC